

PIPING SYSTEMS

Drill Pipe 2.7/8" to 6.5/8"

Wall thickness up to 0.813" and
Length from 3.0m to 18m
Standard API 5D
Grades E75, X95, G105 and S135




Tubing and Casing from 1.315" to 20"

Length from 3.0m to 18m R1, R2, R3
Standard API Spec 5CT.
Grades K55, J55, P110, L80 and N80



Fittings. Flanges, elbows, reducers, tees, from 1/2" to 60" SCH10, STD, SCH40, SCH60, XS, SCH80, SCH120, SCH160, XXS, in Carbon steel, Stainless steel, Duplex Stainless Steel, Alloy steel. Grades ASTM A105, ASTM A182, A860, A694, AWWA C207, ASTM A234 WPB. Standards ASME, ANSI B16.9, ANSI B16.28, MSS-SP-43, DIN2605, DIN2615, DIN2616, DIN2617, DIN28011, EN10253-1, EN10253-2, ASTM A403, ASME B16.9, ASME B16.25, MSS SP-43

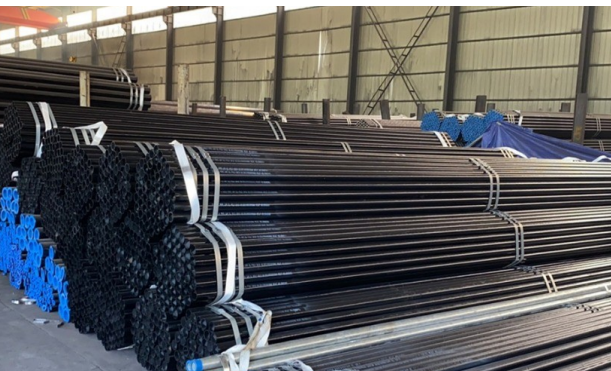

Seamless Steel pipes from 1/4" to 20" in schedules 10s, 40s, 80s, 160 and XXH. Standards A213, A268, A269, A789 in grades

Austenitic: 201, 304/304L, 316/316L, 317/317L, 347/347H, 321/321H, 904L

Ferritic: 409, 430, 439, 441, 434, 436, 444, 446

Martensitic: 403, 410, 410S, 414/L, 441, 418, 420, 440, 416

Duplex: 2205/S31803, S32750, S32760

Special productions as seamless steel pipe NPT 2" mounted with ASME B16.9 couplings.
Threading, welding, cnc, tailored solutions and assemblies done in our own workshops.

